



Column speaker, high audio quality and design. 2-way, **HI-FI. IP65** waterproof protection.

Supplied with bracket for wall mounting.

Nominal power 1,25/2,5/5/10W RMS - 20W peak.

Power to 8 Ohm 10W RMS.

3 loudspeakers (2 woofer + 1 tweeter).

Transformer voltage 100V.

Dispersion 70°(V)x100°(H).

Frequency response 130-20.000Hz.

Sensitivity: 89 dB/106dB.

Speaker dimensions (WxHxD): 121x380x109 mm.

Weight: 3,6 Kg.

White colour RAL 9003.

Aluminium cabinet.

Working temperature from -20° to +60°.


Ideal for Places of worship, outdoor parkings or underground garages, humid ambients, exposure to rain, swimming pools.

VIVALDI

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

 Images

Vivaldi Ulisse CS10T

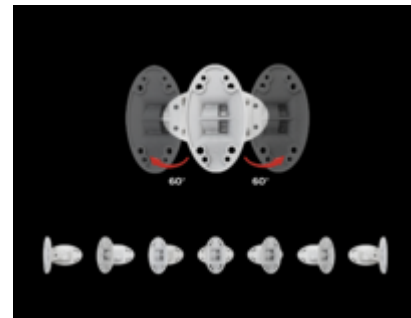

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272