



Column speaker, high audio quality and design. 2-way, **HIFI**. IP65 waterproof protection.

**Certified EN60849 EN54-24.**

Supplied with bracket for wall mounting.

**Nominal power 5/10/20/40W RMS.**

**80W Peak, max 113 dB.**

9 loudspeakers ( 8 woofer + 1 tweeter).

Dispersion 45°(V)x100°(H).

**Transformer voltage 100V.**

Frequency range 100-20000Hz.

Sensitivity: 94dB/114dB.

Dimensions (WxHxD): 121x950x109 mm.

Weight: 7,5 Kg.

Colour white RAL 9003.

Aluminium cabinet.

Working temperature from -20° to +60°.

Ideal for Places of worship, outdoor parkings or underground garages, humid ambients, exposure to rain,

# VIVALDI

swimming pools.


Available version:

- 8 Ohm ([Vivaldi Giove CS40](#))

*Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice*

## Images

## Vivaldi EN54 CS40T

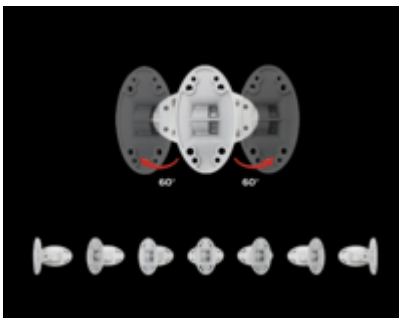

**Vivaldi** srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA  
Tel. +39 0421 307825 - [info@vivaldigroup.it](mailto:info@vivaldigroup.it) - [www.vivaldigroup.it](http://www.vivaldigroup.it)  
P.IVA e C.F. 02880360272