



Column speaker, design and high quality sound level. 2-way **HI-FI. IP65** waterproof treatment.

Supplied with bracket for wall mounting.

Nominal power 2,5/5/10/20W RMS. 40W peak.

Power to 4Ω 20W RMS.

Loudspeakers number: 5 (4 woofer + 1 tweeter).

Dispersion 45°(V)x100°(H)

Transformer voltage 100V.

Frequency response 110-20000 Hz.

Sensitivity: 92dB/110dB

Dimensions (WxHxD) 121x570x109 mm.

Weight 5,2 Kg.

Colour white RAL 9003.

Cabinet: aluminium.

Working temperature from -20° to +60°.


Ideal for places of worship, outdoor or underground parkings, damp environments, exposure to rain, swimming pools.

VIVALDI

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

 Images

Vivaldi Ulisse CS20T

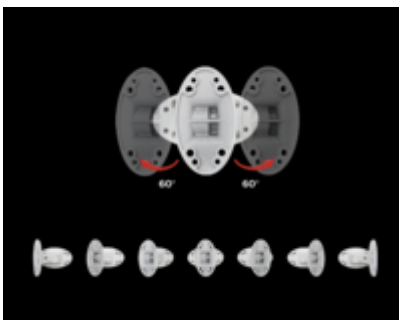

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272