



Column speaker, high audio quality and design. 2-way, **HIFI. IP65** waterproof protection.

Supplied with bracket for wall mounting.

**Impedance 4Ω.**

**Power 160W RMS.**

**Musical power 320W.**

**Peak power 640W.**

9 loudspeakers (8 woofer + 1 tweeter)

Dispersion 45°(V)x100°(H).

Frequency response 100:20.000Hz.

Sensitivity: 94dB/114dB.

Dimensions (WxHxD): 121x950x109 mm.

Weight: 7,5 Kg.

Colour white RAL9003.

Aluminium cabinet.

Working temperature from -20° to +60°.

Ideal for Places of worship, outdoor parkings or underground garages, humid ambients, exposure to rain, swimming pools.


# VIVALDI

Available version:  
- 100V ([Vivaldi EN54 CS40T](#))

*Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice*

## Images

## Vivaldi Giove CS40

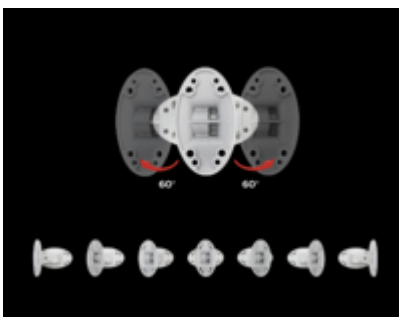

**Vivaldi** srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA  
Tel. +39 0421 307825 - [info@vivaldigroup.it](mailto:info@vivaldigroup.it) - [www.vivaldigroup.it](http://www.vivaldigroup.it)  
P.IVA e C.F. 02880360272